



# USER GUIDE

**Firmware Version: 1.0.x**

Last updated on Nov 28, 2024


# TALKIE


OUTDOOR COMMUNICATION SYSTEM












The firmware version 1.0.x indicates that this manual is applicable to all firmware updates within the version 1.0 series.

## QUICK REFERENCE

 : (+) button

 : (-) button

 : Center button

Type	Operation	Button	Duration
Using the TALKIE	Power on/off		Press for 2 seconds
	Volume up/down	 or 	Single tap
	Mute/unmute mic		Single tap
	Channel selection		Double tap
	Channel and battery check		Triple tap
	Bluetooth headset pairing		Press for 5 seconds
	Bluetooth headset connect/disconnect		Press for 2 seconds
Factory reset			Press for 10 seconds

## SENA TALKIE APP

Download the Sena TALKIE app from the Google Play Store or the App Store.



# CLICK ANY SECTION TO BEGIN



ABOUT THE TALKIE



USING THE TALKIE



FIRMWARE UPDATE




TROUBLESHOOTING



# 01 ABOUT THE TALKIE

## Key Features

- Mesh Intercom range: 0.4 mi (600 m)
- IPx7 Waterproof rating
- A variety of mounting accessories
- Four sets of interchangeable faceplates
- Over-The-Air (OTA) firmware update

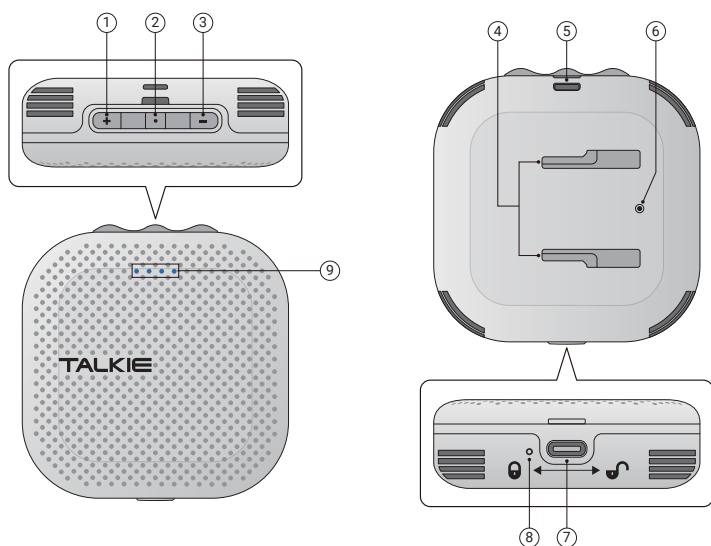


- ① (+) button
- ② Center button
- ③ (-) button
- ④ Mounting slot
- ⑤ Strap hole
- ⑥ Reset pinhole
- ⑦ USB-C charging port
- ⑧ Charging LED
- ⑨ Status LED

## Package Contents

 <p>Magnetic holder</p>	 <p>Carabiner</p>	 <p>Necklace</p>	 <p>Handlebar mount</p>
 <p>Armband holder</p>	 × 3 <p>USB-C protective cover</p>	 <p>Rubber pad</p>	 <p>Long strap</p>
 <p>USB-C charging cable</p>	 <p>Interchangeable faceplates</p>		

## Accessories


### ■ Magnetic Holder

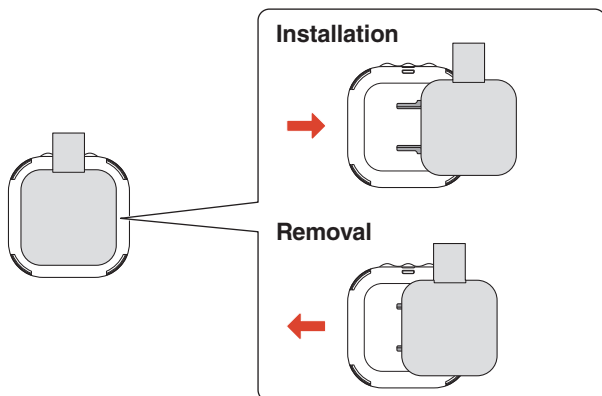





### ■ Carabiner




### ■ Necklace



## Handlebar Mount

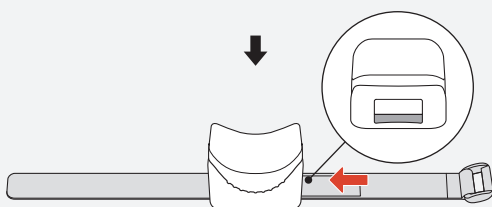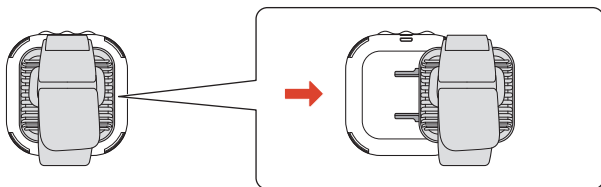


## Armband Holder

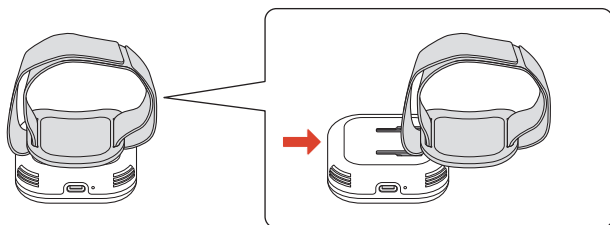


## Interchangeable Faceplates



### Removal




### Installation





## 02 USING THE TALKIE

### Charging



It takes 2.5 hours to fully charge.

- Battery life or performance may be reduced if you do not use a 5V USB charger approved by the FCC, CE, IC, or other locally recognized regulatory agencies.
- Using a non-approved charger may cause fire, explosion, leakage, and other hazards, potentially reducing the battery's lifespan or performance.

### Power On/Off

Press and hold the center button for 2 seconds to power on or off.

### Volume Control

Adjust the volume using the (+) button and (–) button. You'll hear a single high-tone beep when the maximum volume is reached.

### Mesh Intercom

After powering on the TALKIE, it automatically connects to nearby users on the same channel using the Mesh Intercom.

## Mute/Unmute Mic

Tap the center button to mute or unmute the microphone.

## Channel Selection

1. Double tap the center button and you will hear the voice prompt saying, "Channel setting, 1."
2. Tap the (+) button or (–) button to select the mesh channel.
3. To confirm the channel, tap the center button. You will hear the voice prompt saying, "Channel is set."

- The channel will be automatically saved if no buttons are pressed for 10 seconds on a specific channel.
- The channel will be saved even if the TALKIE is turned off.

## Channel and Battery Check

Triple tap the center button to check the Mesh Intercom channel and the battery level.

## CloseMute

The CloseMute feature of the TALKIE automatically reduces speaker volume and microphone sensitivity when two units are in close proximity, effectively minimizing unnecessary echo.

For optimal intercom functionality, ensure that devices are kept farther apart than the distance at which natural voices can be heard without shouting.



## **Bluetooth Headset**

The TALKIE allows you to use a Bluetooth headset while still utilizing its built-in microphone for added privacy.

### **• Bluetooth Headset Pairing**

1. Press and hold the (–) button for 5 seconds until you hear the voice prompt saying, “Headset Pairing.”
2. Enter Bluetooth pairing mode on the Bluetooth headset and wait a moment until you hear the voice prompt saying, “Headset Connected.”

### **• Bluetooth Headset Connect/Disconnect**

Press and hold the (–) button for 2 seconds to connect/disconnect to the already paired Bluetooth headset and you will hear the voice prompt saying, “Headset connected/Headset disconnected.”

## 03 FIRMWARE UPDATE

You can update the firmware via Over-The-Air (OTA) directly from the settings in the Sena TALKIE app.


## 04 TROUBLESHOOTING

### Factory Reset

Press and hold the (–) button for 10 seconds until you hear the voice prompt saying, “Factory reset.” The TALKIE will then reset to its default settings and turn off.

### Fault Reset

If the TALKIE is on but not responding, you can perform a fault reset to restore normal functionality. Use a clip to press the reset pinhole on the back. All settings will remain unchanged.





Copyright 2024 Sena Technologies, Inc.  
All rights reserved.

© 1998–2024 Sena Technologies, Inc. All rights reserved.

Sena Technologies, Inc. reserves the right to make any changes and improvements to its product without providing prior notice.

Sena™ is a trademark of Sena Technologies, Inc. or its subsidiaries in the USA and other countries.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Sena is under license.

Sena Technologies, Inc.  
152 Technology Drive, Irvine, CA 92618